



Arena Surface Rake

The smart solution for grading all classic riding surfaces.

The harrow's frame is fitted with replaceable hay – bob tines that are easy adjustable in height and, with a blade that can be varied in both the vertical and diagonal plane. A spring loaded device incorporated within the frame regulates the intervention of an inbuilt overload safety facility. An adjustable roller wheel regulated to the correct inclination makes it possible to rake right up to a wall. If you get too close, the entire rake will push itself away and realign when enough clearance is achieved.



Riding Track Drag

Ideal for thin surface layers with grids, mats and fleece as substructure.

The riding track drag optimally meets the changed structure of today's riding arenas. It produces reliable leveling of the upper surface without endangering the sensitive substructure.

Two angle section chisels break up the surface which is then distributed and compacted with the rounded blade. The rake frame, with replaceable rake, is continuously adjustable in height. Additional sliding rails guarantee long durability. The device with wall lining scraper and roller wheel is available for tractors of 30 HP and upwards.

Of course all basic fabrication is in galvanized steel.




Arena surface rake/roller

The all-rounder for professional surface maintenance.

The rake teeth "swirl" the surface, the adjustable blade levels it and the roller wheels compact the ground. Using a spindle the frame can be easily adjusted. The machine can be delivered with either a roller wheel or a mash pattern roller.

The wall lining scraper with the boundary wheel is standard. For transport purpose, the frame is adjusted with the jackscrew in such a manner that the device rests on the roller wheel.

Optionally, the machine can be equipped with a 12-V spindle motor or a hydraulic cylinder to adjust the height; or alternatively with a ball hitch or three-point linkage with castor device for tractor mounting.

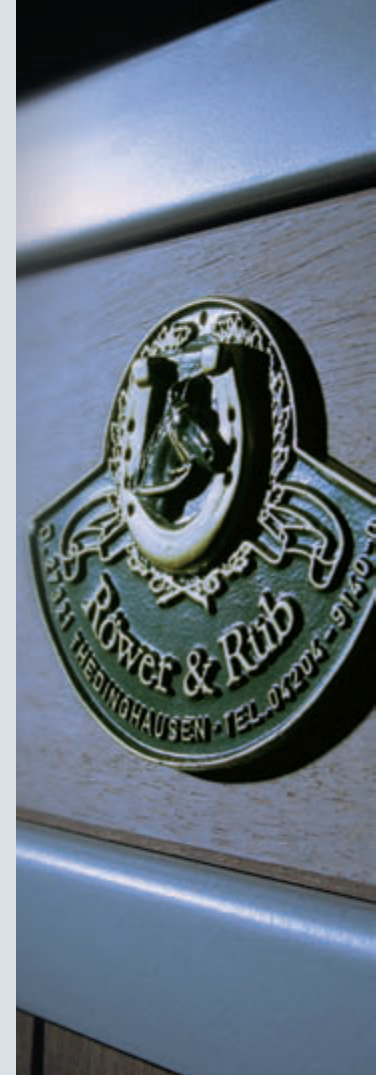

Röwer & Rüb
EQUESTRIAN EQUIPMENT

Syker Straße 205-213
27321 Thedinghausen
Germany

Telefon +49 - 42 04 - 91 40 0
www.roewer-rueb.de
info@roewer-rueb.de




Arena surface rake

Article number	Width	Overload safety device	Weight	Blades	Net price, ex VAT (Sales tax)
RBP - 230 L	2,30 m	Yes	200 kg	13	€ 1.570,00 €
RBP - 270 X	2,70 m	Yes	230 kg	15	€ 1.590,00 €

Surcharge: Second wall lining roller wheel € 50.00

Riding track drag

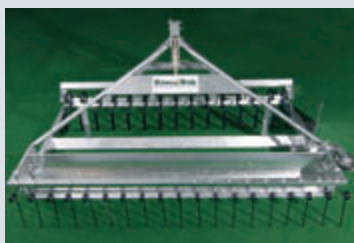

Article number	Width	Weight	Blades	Rake teeth	Net price, ex VAT (Sales tax)
RBS 200 (for tractors from 30 hp)	2,00 m	210 kg	12	15	€ 1.750,00
RBS 250 (for tractors from 40 hp)	2,50 m	240 kg	13	19	€ 1.850,00
RBS 300 (for tractors from 50 hp)	3,00 m	270 kg	14	23	€ 1.990,00

Surcharges: Harrow frame € 260,00/Rake frame € 190,00/Wall lining scraper € 90,00.

Shipping dimensions: 200/250/300 x 80 x 150 cm.



Arena surface roller

Article number	Width	Trailer device	Weight	Rake teeth	Net price, ex VAT (Sales tax)
RBW 17 NR	1,70 m	Castor device + tyre roller	280 kg	17	€ 3.690,00
RBW 17 NG	1,70 m	Castor device + mash pattern roller	240 kg	17	€ 3.190,00
RBW 22 NR	2,20 m	Castor device + tyre roller	320 kg	19	€ 4.190,00
RBW 22 NG	2,20 m	Castor device + mash pattern roller	280 kg	19	€ 3.690,00


For 4-wheel drive or quads from 500 ccm:

RBW 17 KR	1,70 m	Fitted ball hitch + tyre roller	270 kg	17	€ 3.490,00
RBW 17 KG	1,70 m	Fitted ball-hitch + mash pattern roller	230 kg	17	€ 2.990,00

For 4-wheel drive or quads from 750 ccm:

RBW 22 KR	2,20 m	Fitted ball hitch + tyre roller	310 kg	19	€ 3.990,00
RBW 22 KG	2,20 m	Fitted ball-hitch + mash pattern roller	270 kg	19	€ 3.490,00

Surcharges: Hydraulic cylinder € 190,00/Electric jackscrew € 290,00/Additional wall lining scraper € 90,00.

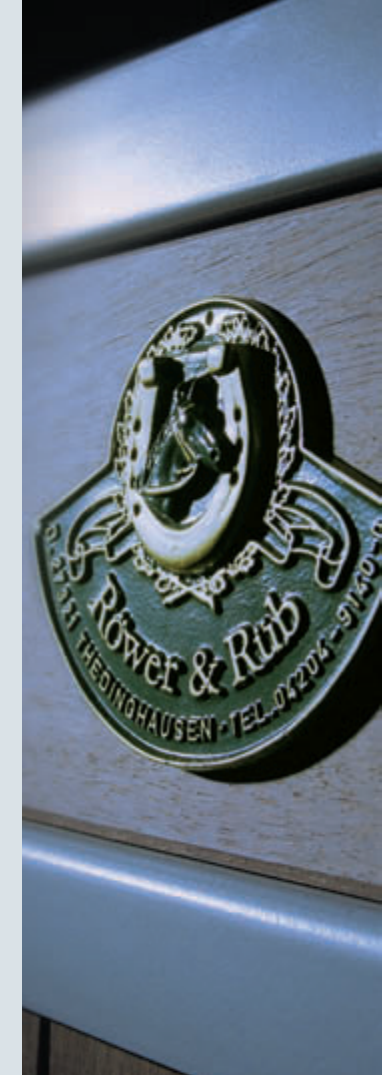

Röwer & Rüb
EQUESTRIAN EQUIPMENT

Syker Straße 205-213
27321 Thedinghausen
Germany
Telefon +49 - 42 04 - 91 40 0
www.roewer-rueb.de
info@roewer-rueb.de